




Oasis® 2900 Solar Insect Shade INSTALLATION INSTRUCTIONS

Oasis® 2900 Solar Insect Shade system is available with SHY Zip side track and motorized only. **For Oasis 2900 units with complete head box, follow installation instructions below.** For Oasis 2900E with exposed bracket / pocket mount shades refer to instructions on page 2.


OASIS 2900 MOTORIZED SHADE WITH SIDE TRACKS & HEAD BOX

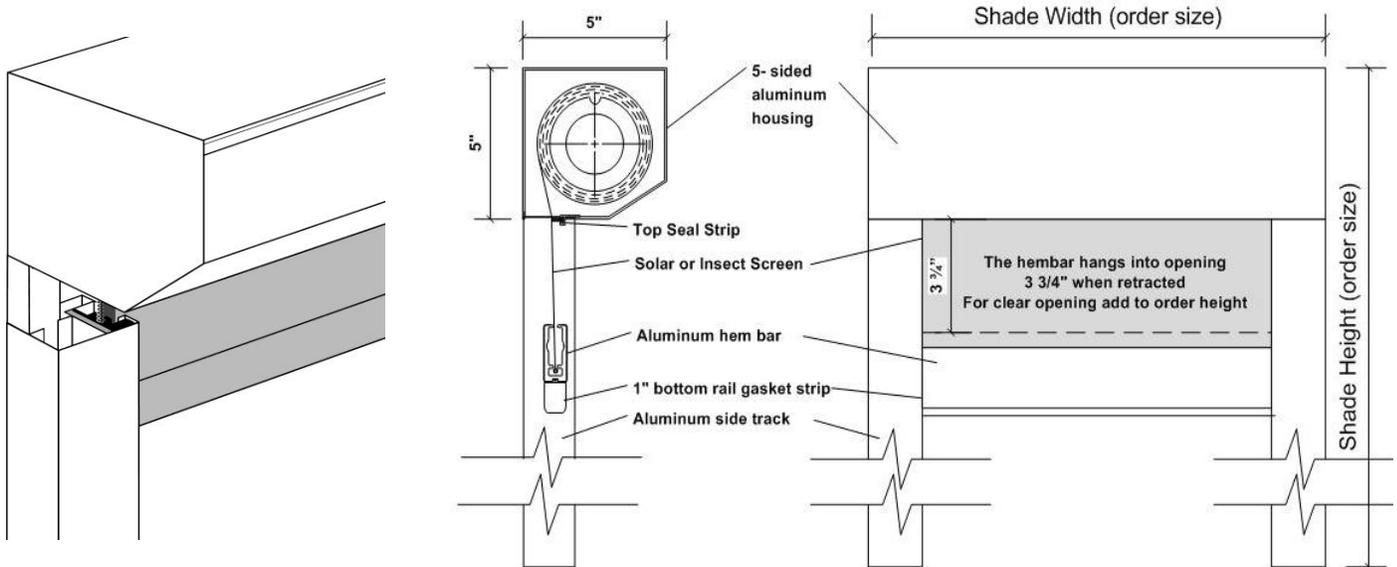

1. Mount rails at appropriate opening width and height. Mount side tracks with # 8 or #10 screw (not provided) at appropriate width. Tracks must be mounted plumb and parallel. The end of track with a "V" at the top of the SHY Zip inner rail goes at top. Orient tracks so bracket mounting peg goes into track cavity closer to wall. *Note: If you do not have 7 3/4" clearance at top of side rails you will need to mount side rails and head box at the same time.

INSTALLATION TIP

Side tracks may require some field adjustment after shade zipper is inserted into side tracks. Before tightening side tracks, run shade up and down to make sure it runs smoothly. If tracks are being recessed into columns, shade adjustments must happen while tracks are accessible. Re-measure tracks at top, middle, and bottom. **Tolerances are very tight.** Tracks may need to be shimmed to make sure they are parallel.

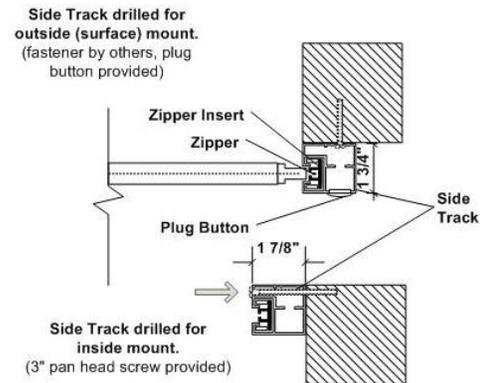

2. Remove front cover.
3. Remove motor retainer ring. Remove shade and roller tube by compressing spring idler and removing motor from motor mount.
4. Slide head box into sidetracks. Make sure peg on bracket slides down into hollow cavity on sidetracks. The head box is supplied with a silver metal reinforcement bracket, which has two holes on




Motor Mount



Motor Retainer Clip



the top and two holes in the back. Screw brackets to wall or post with #10 x 1 1/2" or longer pan-head screws (not provided).

On wider units, secure back cover to wall between brackets with screws (not provided). Be careful not to tighten down screws too hard as this may cause damage to the head box. Drill a hole either through top or back of head box to route the motor wire out of box.



5. Re-install shade in head box by depressing idler end into idler bracket and inserting motor into motor mount. Make sure limit switches are accessible and motor wire does not interfere with shade operation.
6. Attach motor retainer clip onto motor head.
7. Use test switch to lower shade approximately 8". Route zippers into side track inserts. Both sides must be inserted at the same time and evenly.
8. Set limit switches on motor. (See limit setting instructions). Upper limit must be set so that entire hem bar remains in side track. Operate shade several times to test.
9. Reinstall front cover of head box. Install plug buttons on side rails for surface mount installations.

OASIS 2900E EXPOSED BRACKET OR POCKET INSTALLATION

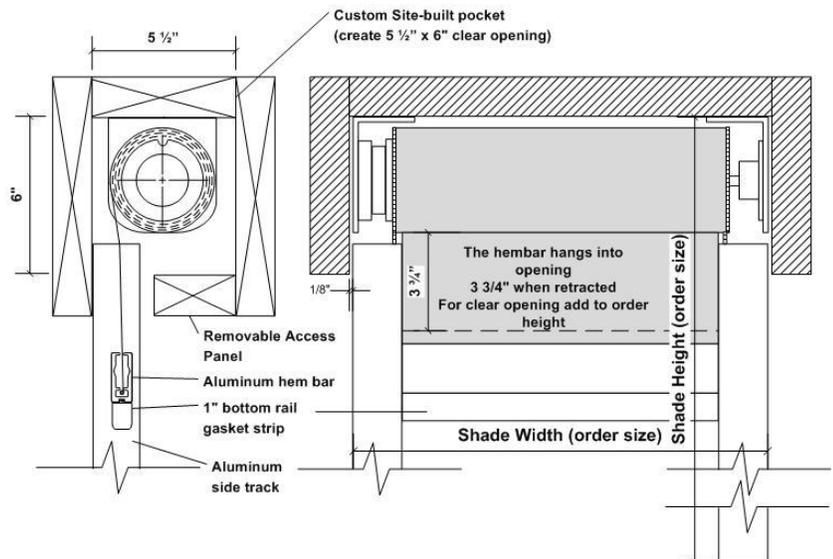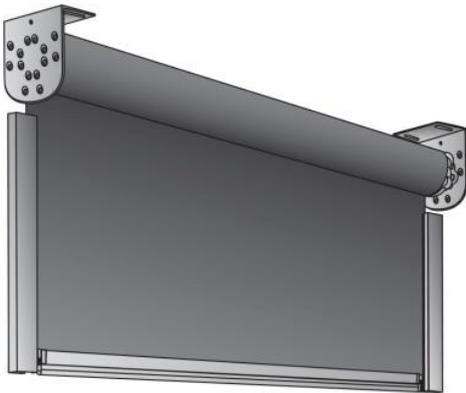


1. Install Oasis 2900E brackets (can be installed as ceiling or wall mount). The bracket and track width are both the same as order width (1/8" factory deduction on inside mounts). For Ceiling mounts, try to align bracket positioning with the track location so fabric drops straight into tracks.
2. Mount rails at appropriate opening width and height. Tracks must be mounted plumb and parallel. The end of track with a "V" at the top of the SHY Zip inner rail goes at top.

INSTALLATION TIP

Side tracks may require some field adjustment after shade zipper is inserted into side tracks. Before tightening side tracks, run shade up and down to make sure it runs smoothly. If tracks are being recessed into columns, shade adjustments must happen while tracks are accessible. Re-measure tracks at top, middle, and bottom. **Tolerances are very tight.** Tracks may need to be shimmed to make sure they are parallel.

3. Install shade into brackets by depressing idler end into idler bracket and inserting motor into motor mount. Make sure limit switches are accessible and motor wire does not interfere with shade operation.
4. Attach motor retainer clip onto motor head.
5. Use test switch to lower shade approximately 8". Route zippers into side track inserts. Both sides must be inserted at the same time and evenly.
6. Set limit switches on motor. (See limit setting instructions). Upper limit must be set so that entire hem bar remains in side track. Operate shade several times to test.
7. Install front cover of head box.
8. Install plug buttons on side rails for surface mount installations.

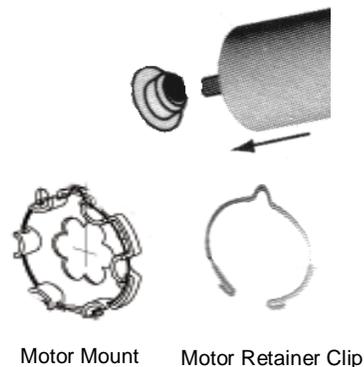

TROUBLESHOOTING - SHADE DOES NOT DROP SMOOTHLY

1. Check the track width at top, middle, & bottom. Compare with order dimensions. Check tracks with a level to insure that they are plumb. Make sure the tracks are not twisted. Tracks may need to be adjusted in or out (or shimmed).
2. Additional adjustments may be made by removing SHY Zip bumper cushions at the location where the shade binds up.

Insolroll® uses the time proven SHY Zip technology to seal the edges of the shade. SHY Zip is a product of SHY Co. LTD of Japan and distributed exclusively in North America by its authorized sub-licensees.

For more assistance: Contact Insolroll, Inc.
www.insolroll.com 800-447-5534 REV 6/13